



# GSC-7153W System Controller

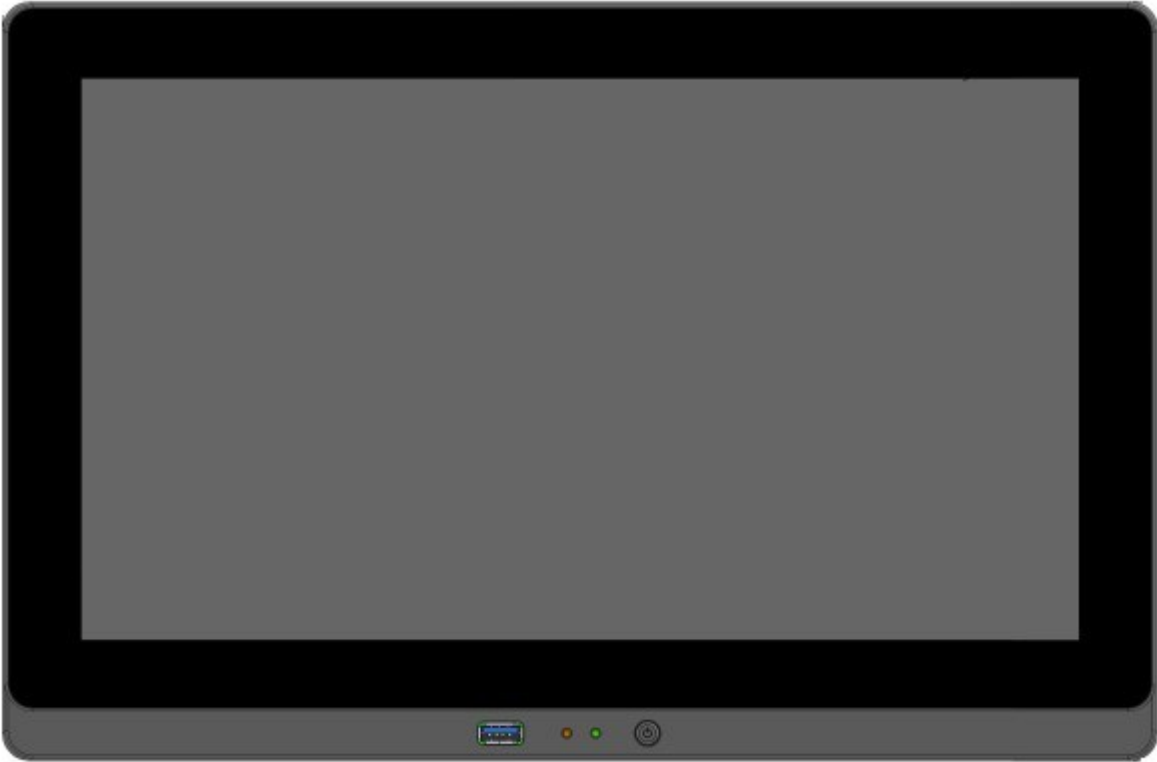

D C B A  
f e d c b a g

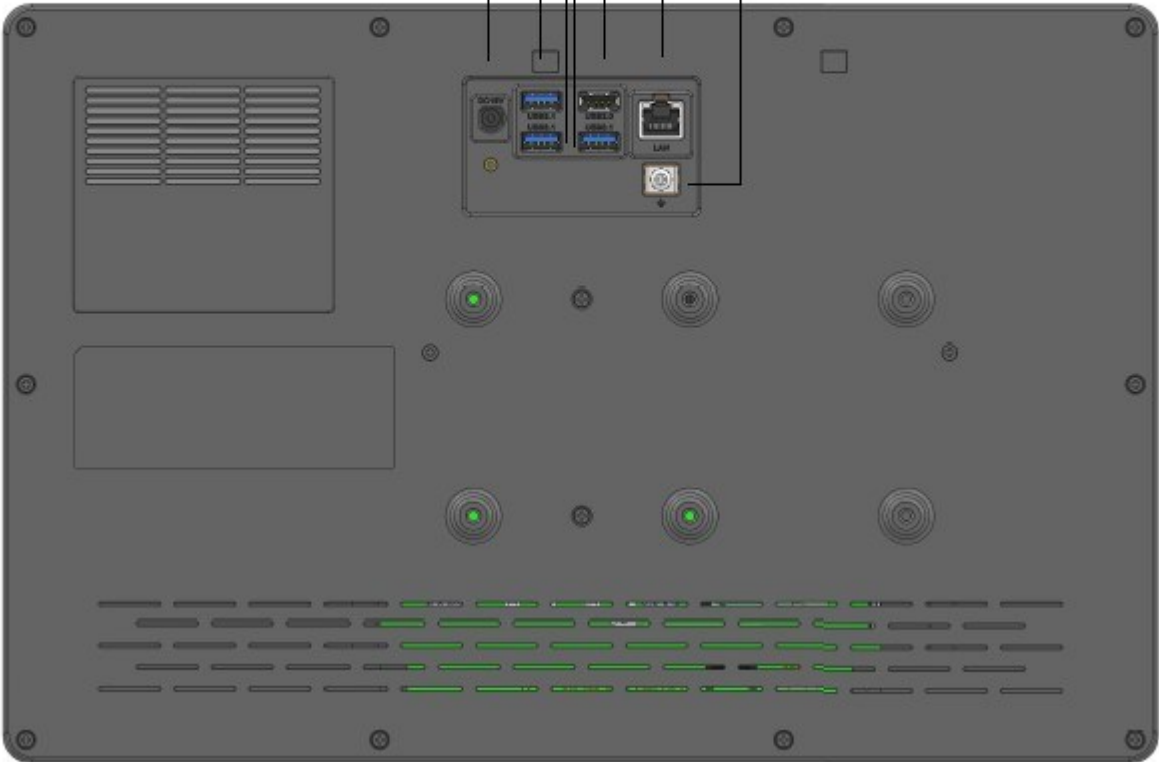

# Connections

<b>A</b>	<b>Power Button</b>
<b>B</b>	<b>Power Status LED Indicator (ON : Green, Standby : Flash)</b>
<b>C</b>	<b>HDD Status LED Indicator (Orange Flash : R/W)</b>
<b>D</b>	<b>USB 3.0 Port</b>
<b>a</b>	<b>LAN Network (RJ45)</b>
<b>b</b>	<b>USB 2.0 Port</b>
<b>c,d,e</b>	<b>USB 3.0 Port</b>
<b>f</b>	<b>DC-IN Jack</b>
<b>G</b>	<b>Grounding</b>

## Installation of the power cord bracket

1. One power cord bracket and screw in accessories box.
2. Remove all power and confirm that the power supply is disconnected from its power source.
3. Fasten the power cord bracket on the rear side of the System Controller with one screw.



## Installation of the ground wire

1. One ground wire is supplied in the accessories box.
2. This only needs to be fitted if required by local regulations.  
In most countries, an earth connection is provided through the power cord.



3. Fasten the ground wire to the screw (a) on the rear side of the System Controller. Attach the other end as required by local regulations.