

Colortrac	<b>SmartWorks 6.x System Controller Manual upgrade Z24/36</b>	Document number SG15988
Date: 03/12/2025		

**1. Determine the System Controller model by the controller label**



The type of the system controller can be read at the rear of the controller on the Label in the red marked area. This example shows the GSC-7153W System Controller.

**Note:** As alternative the System Controller model can be determined in the software; See [www.mfpcolortrac.com](http://www.mfpcolortrac.com) (How to determine the SmartWorks 6 System Controller type for the Z24-Z36)

**Note:** GSC-7153W can be read as GCS-7152W in case of a GSC7152W System Controller.

**Note:** When having both images on one USB-Stick the controller will use the correct one automatically.

**2. Download the New Image V6.4**

To update to the latest system controller software visit <https://mfpcolortrac.com/MFP6> and download the correct file for your system.

Save all the files to the same location on the PC and only run/unzip GSC7153W\_system\_2.0.2.release.zip This will then re-assemble and create a single GSC7153W\_system\_2.0.2.cif image file.

Copy the GSC7153W\_system\_2.0.2.cif image file to a NTFS formatted USB-stick


**3. Retrieve the information needed that is needed after the update**

- In case the printer is connected over LAN: go to settings – Printer Settings – Printer Setup and write down the printer type and IP-address.
- In case the printer is connected through USB: go to settings – Printer Settings – Printer Setup and write down the printer type.
- Go to settings – System Administration – System settings – Network settings and note all the network related settings.


**4. Update the SmartWorks Software**

- On the system controller go to Settings – System Administration (Administrator only) – Factory Defaults - System Update and Recovery


Colortrac	<b>SmartWorks 6.x System Controller Manual upgrade Z24/36</b>	Document number SG15988
Date: 03/12/2025		

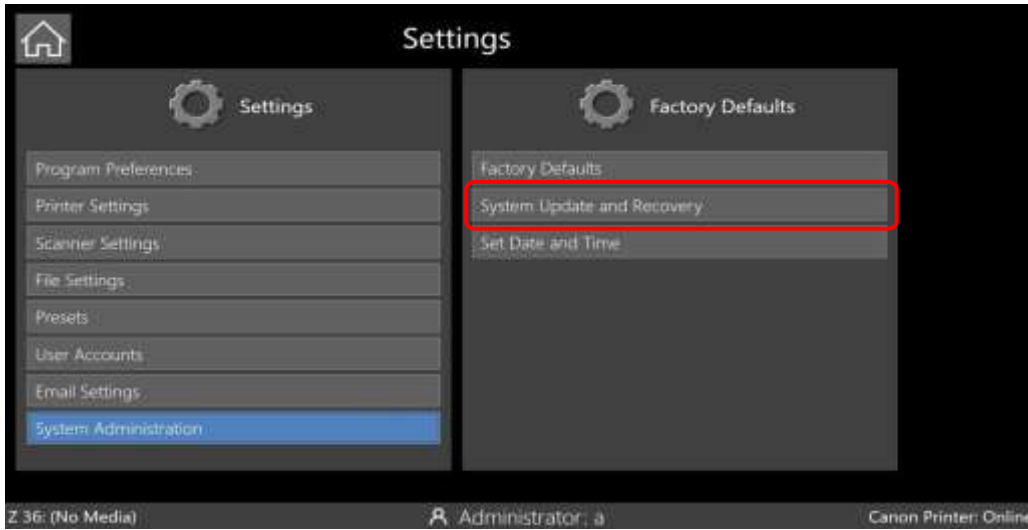

- This will automatically restart the system into System Tool mode.
- After restart of the System Controller the Installation & Recovery screen will be displayed
- Insert a USB stick on the front of System Controller
- Press System Update

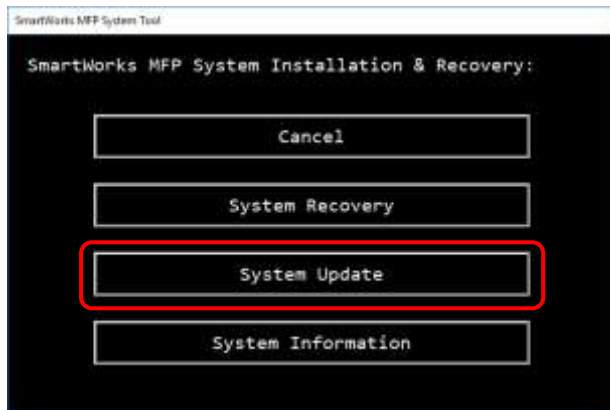

- Insert the USB stick that contains the new System Controller release.

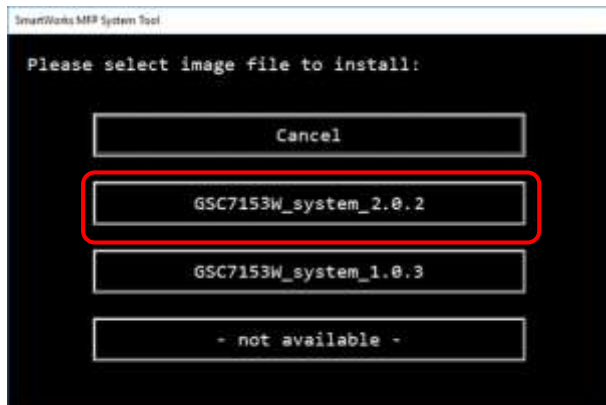


- Select the latest image file to install.

Colortrac	<b>SmartWorks 6.x System Controller Manual upgrade Z24/36</b>	Document number SG15988
Date: 03/12/2025		


- Select whether to keep previous User Settings (User Presets, User Accounts and User Logs) or Factory Default.

**Note:** Advised is to use “keep previous user settings”

**WARNING:** Using Factory Default Settings will remove all User Settings (i.e. User Presets, User Accounts and User Logs).

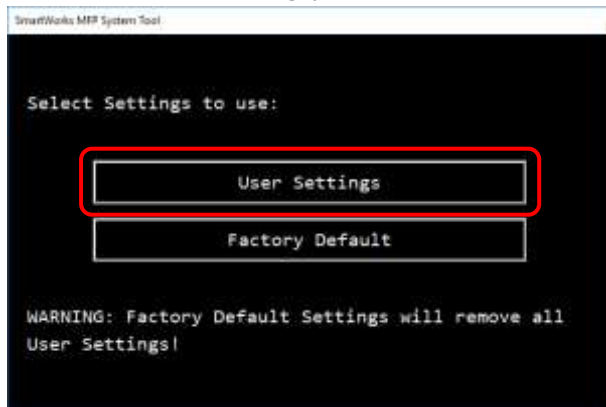

- Wait for system to install the image (indication 8min). **WARNING:** Do NOT power off the system!

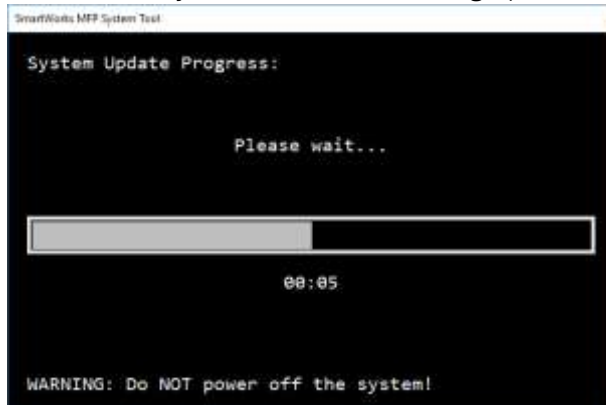

- When the update has finished remove the USB stick and select Normal System Operation

Colortrac	<b>SmartWorks 6.x System Controller</b> <b>Manual upgrade Z24/36</b>	Document number
Date: 03/12/2025		SG15988



- At first boot after the upgrade follow the start-up wizard.
- Follow the installation wizard and enter all data previously collected in step 3
- Installation done.

**TIP:** Set automatic updates on via System Administration -> System Update

