

Colortrac	Z series Scanner: System Image and Security updates	Document number UG16007-1
Date: 25/02/2026		

Approval	F v Dinther
Product	Z series scanners with GSC715x System Controllers
Version	From SmartWorks MFP Version 6.4 onwards
New functionality	Manual and Automatic updates

From SmartWorksMFP 6.4 onwards in addition to Manual Updates, Automatic updates are also available.

For manual and automatic updates from an internal server/folder, download the update files from www.mfpdownload.com.

Note: there are different System Update files for the GSC7152W and GSC7153W System Controller. The System Controller will check for the right system image at install.

Manual Updates




For manual updates of System Images and Security updates copy the update file to an NTFS formatted USB stick and start the Manual Update/Recovery or Manual Security update option. (Settings – System Administration – System Update – Manual Update/Recovery)

Automatic Updates


Two options for Automatic updates are available: From a GS hosted server or an internal server/folder. This 2nd option allows an internal check of the System and Security update before rolling it out to individual systems (intended for larger companies)

At power on or waking from sleep mode, the System Controller checks if there is an upgrade available and starts to download the upgrade file in the background. At the next boot, the System Controller (when the download is complete) will prompt the user with the option to install or postpone the upgrade. All system settings will be kept after the upgrade.


Colortrac	Z series Scanner: System Image and Security updates	Document number UG16007-1
Date: 25/02/2026		

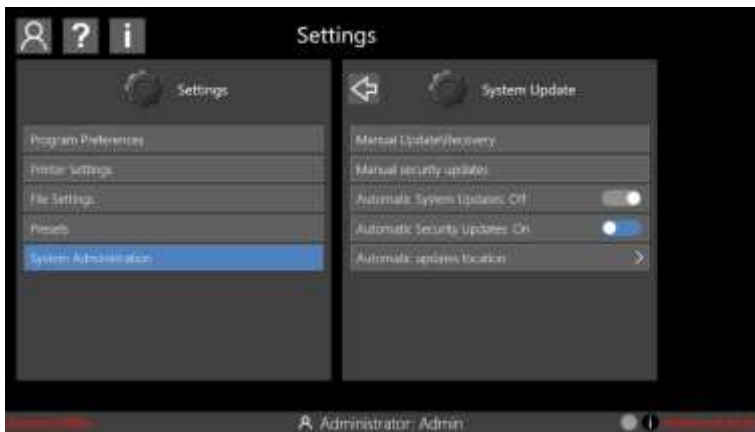

For automatic Security updates only set Automatic Security updates to on.

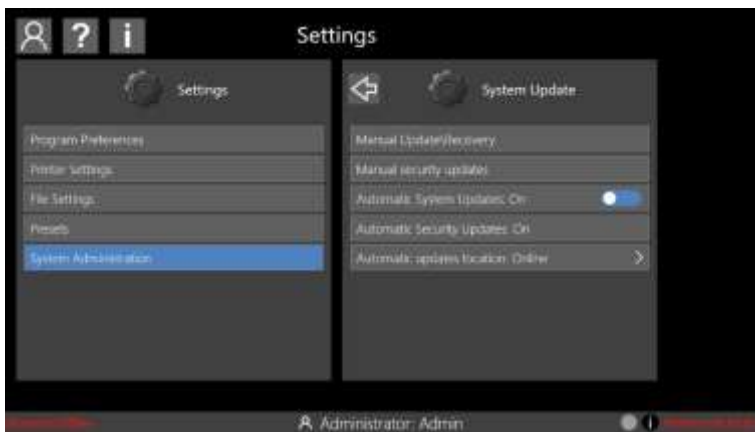


For Automatic System updates set Automatic System Updates to on. Note - Security updates are then also set to automatic.

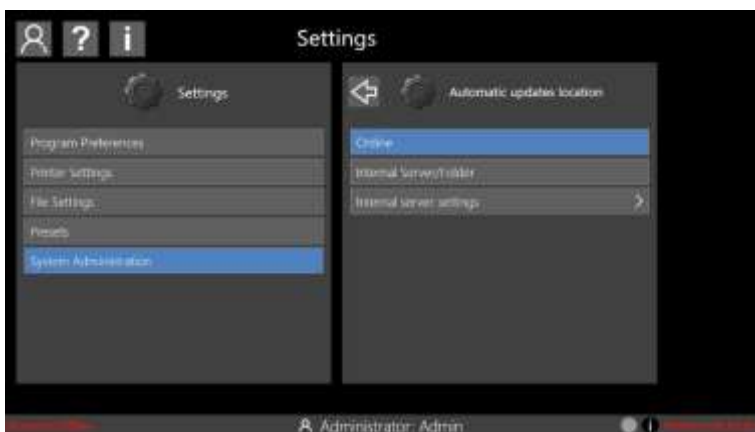

By default Automatic Updates are set to Online (GS server).

Colortrac	Z series Scanner: System Image and Security updates	Document number UG16007-1
Date: 25/02/2026		

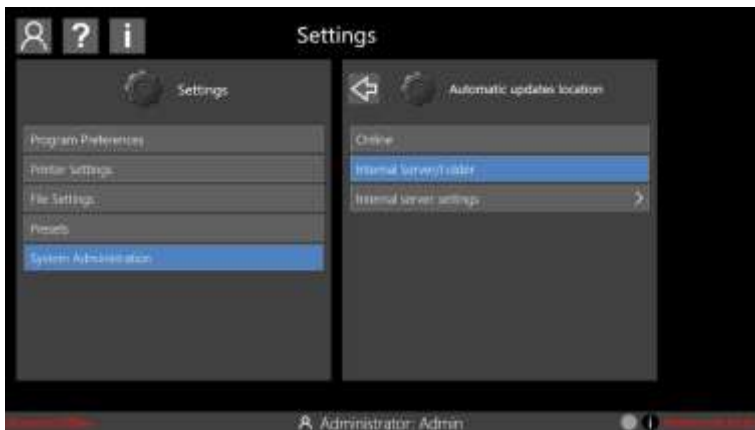

This can be changed to Internal Server/Folder (Settings – System Administration – System Update – Automatic updates Location – Internal server)



Set the Automatic Update location. (Settings – System Administration – System Update – Automatic updates Location – Internal server settings)

This can be a location outside the network segment.

The update/security update file along with the xlm file that have been downloaded from the support site must all be in the defined folder.

